EPD Micro Capsule Filters

Pleated Polypropylene Depth Media

EPD Micro Capsule filters are constructed with pleated Polypropylene Depth Media for prefiltering critical process liquids including water, chemicals and solvents. Products are designed to meet the needs of the electronics and high-purity chemical industries. Pore sizes range from 0.10 to 100 µm. Other filter devices scale from laboratory to full production using identical materials to ensure consistent results.

These filters have superior retention and protect downstream filters and processes by removing large amounts of particulate and other contaminants. They are rated at 99.9% efficiency at the indicated pore size. Designed for high capacity and long life, the EPD Micro Capsule is a very cost-effective filter.

EPD Micro Capsule filters are pulse power flushed until the rinse effluent reaches 18+ Megohm-cm and less than 3ppb TOC.

Critical Process provides unrivaled delivery times, technical consulting before purchasing, and very competitively priced high-performance products. Our comprehensive testing & analysis and validation services support your team whenever they need it. Your process experts partnering with our filtration experts is how we deliver your company's solution right the first time.

Fine Particle Removal

MICRO CAPSULES – Nominal Dimensions
Body Length: 1.9 in. (4.8 cm)
Overall Length: 2.8 to 3.8 in. (7.1 to 9.7 cm)
Outside Diameter: 2.6 in. (6.6 cm)



EPD Micro Capsule filters are recommended for fine particle removal in:

- Ultrapure DI Water
- Chemicals
- Acids & Bases
- Plating Solutions
- Etch Baths
- Solvents

© Critical Process Filtration, Inc.

Maximum Operating Parameters

	MICRO CAPSULES
Liquid Operational Pressure	80 psi at 68 °F (5.52 bard at 20 °C)
Gases Operational Pressure	60 psi at 68 °F (4.14 bar at 20 °C)
Operating Temperature (water)	110 °F at 30 psid (43 °C at 2.07 bard)
Forward Differential Pressure	50 psid at 68 °F (3.45 bard at 20 °C)
Reverse Differential Pressure	40 psid at 68 °F (2.76 bard at 20 °C)
Recommended Changeout Pressure	35 psid (2.41 bard)

Sanitization & Sterilization

Autoclave	250 °F (121 °C), 30 min, 25+ cycles
Chemical Sanitization	Performed using industry standard concentrations of hydrogen peroxide, peracetic acid, sodium hypochlorite and other selected chemicals.

Filtration Area (Nominal)

	Pleated Depth Media
Area	0.53 ft^2
	492 cm^2

Construction Materials

Filtration Media	Pleated Polypropylene Depth Media
Media Support	Polypropylene
End Caps, Center Core, Outer Support Cage, Micro Capsule Housing	Polypropylene
Sealing Method	Thermal Bonding

Extractables

EPD Micro Capsule filters typically exhibit low levels of non-volatile residues.

TOC and Conductivity

EPD Micro Capsule filter water effluent conforms with the TOC and water conductivity standards of SEMI Standard F63 after an appropriate flush with ultrapure water.

Non-Fiber Releasing

EPD Micro Capsule filters comply with Title 21 CFR sections 210.3 (b)(6) and 211.72, for non-fiber releasing filters.

© Critical Process Filtration, Inc.

Flow Rates for EPD Micro Capsules by Pore Size

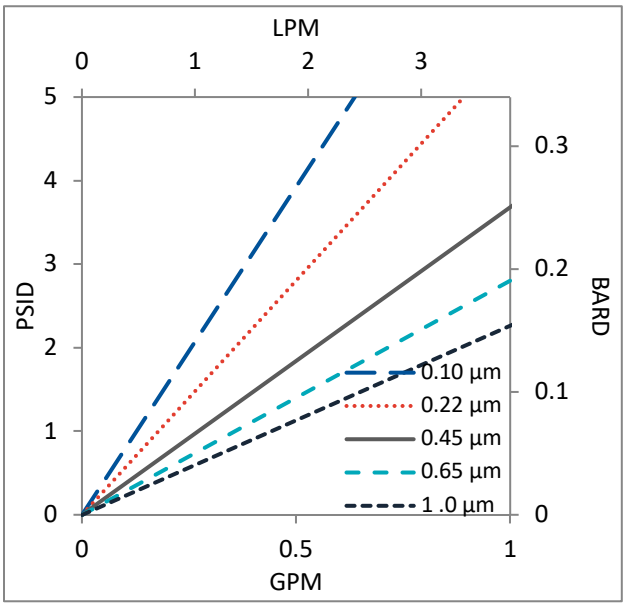

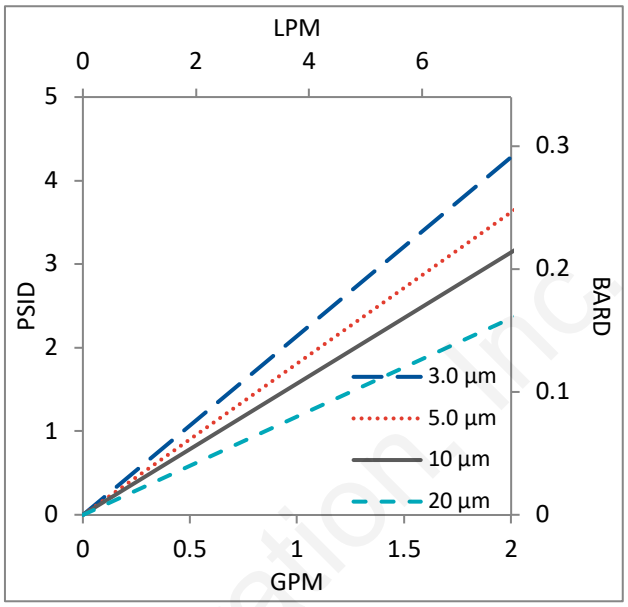

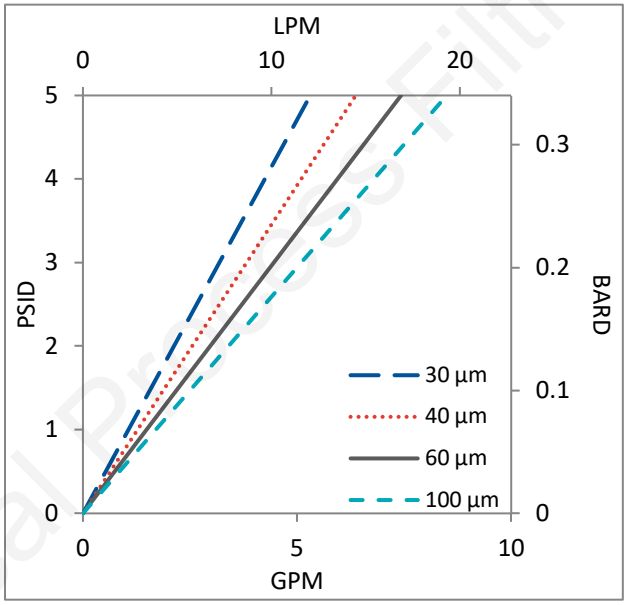

Flow rates for Micro Capsule filters are per filter. The test fluid is water at ambient temperature. Flows are tested using a Micro capsule filter with ½" Sanitary inlet and outlet ports. Rates will vary based on end configuration of the Micro capsule.

© Critical Process Filtration, Inc.

EPD Micro Capsule Filters Ordering Information

All Critical Process filters are configurable to meet customer specifications.
Fill in the corresponding codes in the boxes below to build your Part Number.

To consult with one of our technical team members, request a quote or place an order:
call (603) 880-4420 or contact us here.

Micro Capsule Filters

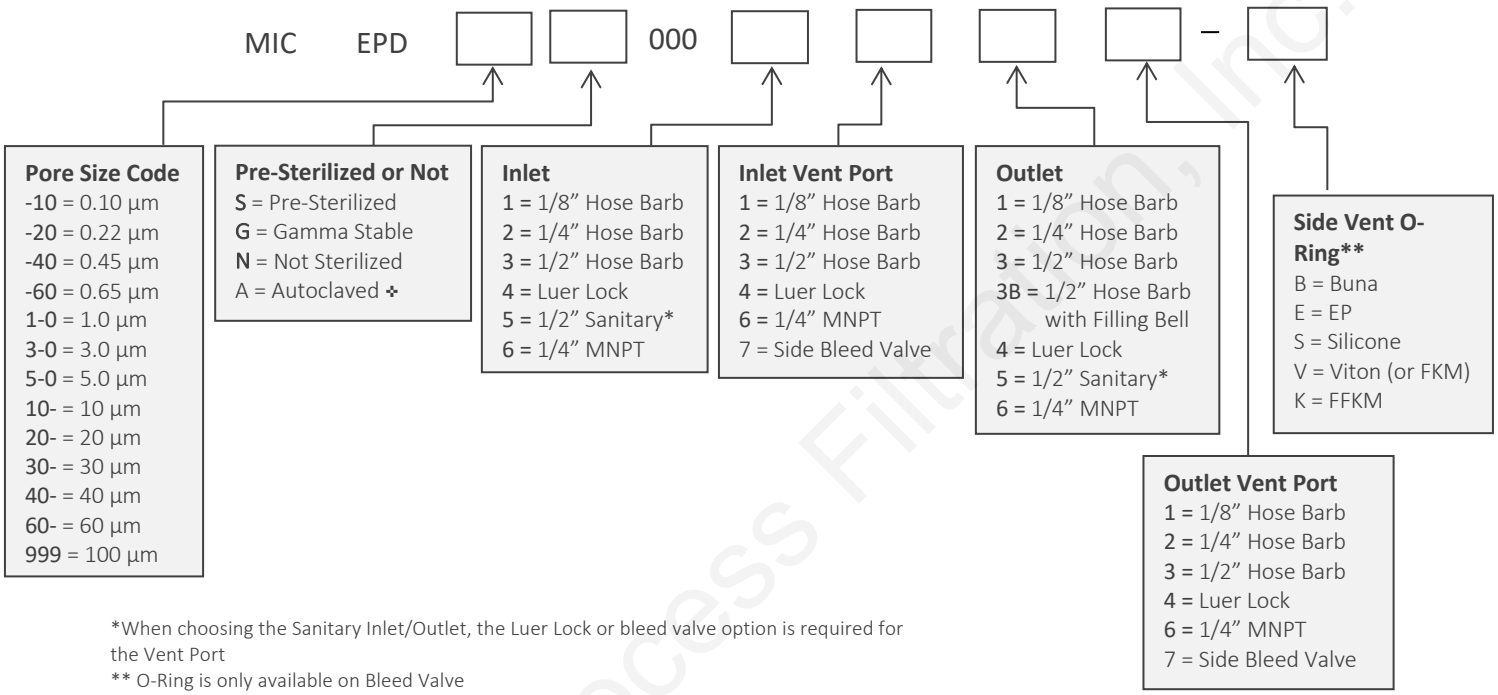

*When choosing the Sanitary Inlet/Outlet, the Luer Lock or bleed valve option is required for the Vent Port
** O-Ring is only available on Bleed Valve

✣ Not Validated for Sterility

© Critical Process Filtration, Inc.

CRITICAL PROCESS FILTRATION, INC.

One Chestnut Street
Nashua, NH 03060
603.880.4420
FAX: 603.880.4536

CriticalProcess.com

The information contained herein is subject to change without notice. The Critical Process Filtration logo is a trademark of Critical Process Filtration, Inc. Viton is a trademark of DuPont Performance Elastomers L.L.C.
© 2026 Critical Process Filtration, Inc. • All Rights Reserved